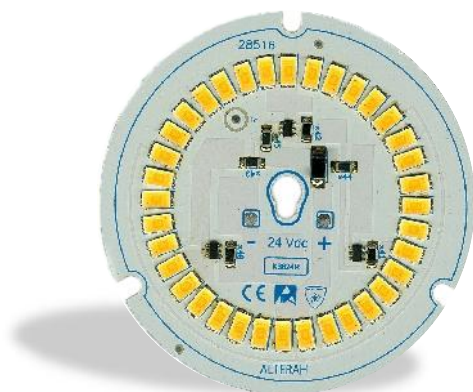


## Short form Characteristics


**ELECTRICAL**

Power	18W
Input Voltage	24V
Input Voltage range	22-27V
Type of current	DC
Over temp.protection	150°C
Energy class	A+

**PHOTOMETRICAL**

Flux nominal	2520lm
Efficiency	140lm/W
Number of LED's	36
Rendering Index	Ra80
SDCM (Mac Adam)	3
Spread angle lens	130°
Colour temperatures	2700K 3000K 4000K 5700K

**ENVIRONMENTAL**


Temperature range	-40°C to 65°C (Absolute max .temp Tc 65°)
Relative Humidity	10-75%
Ambient air pressure	500-1060 hPa

**MECHANICAL**

Module dimension	Diam.70mm
Weight	23 gr
Assembly holes	na
Connection	terminals

**LIFE LENGHT**

Life lenght L70B10	>50 000h
--------------------	----------

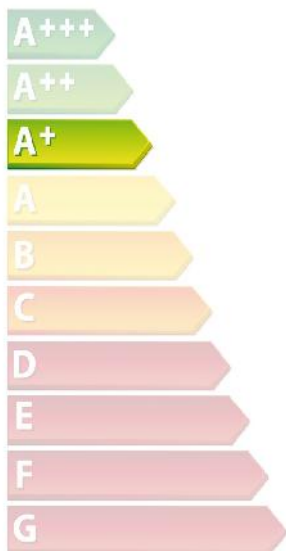

Coding

KA.nn.ww.v.k.s

<b>NN</b>	Numero led
<b>WW</b>	Potenza
<b>Voltage</b>	(1) 110V (3) 230V (4) 240V (6) 24V
<b>K</b>	(2) 2700K (3) 3000K (4) 4000K (5) 5700K
<b>S</b>	( C ) Cob ( Q ) Quadro ( R ) Rotondo (S) Lineare (Q) Corona (K) Kobra

Article name and version

ARTICLE NAME	POWER	VOLTAGE	LED	CCT
KA361862R	18	24	36	2700
KA361863R	18	24	36	3000
KA361864R	18	24	36	4000
KA361865R	18	24	36	5700

